

Depositor Model DPX

Compact design! Light weight!

Easy operation, Easy maintenance!



Filling selection mode

Filling weight and nozzle height are adjusted automatically by selecting a filling item on the operation monitor.

Valve case

The weight has become less than half of the conventional model. It turns to 90 deg. with one-sided support for easier cleaning and maintenance. The conveyor underneath is free to use when revolved to 90 deg.

Servo drive

Servo driven piston and valve can be precisely set in motion in accordance with each filling.

Cleaning mode

Selecting a cleaning mode on the operation monitor will automatically move the valve to wash the hopper and valve inside easily.


Weight compensation

Just putting a deposited product on the scale will automatically adjust the filling weight row by row. (optional item)

 **OSHIKIRI**



Model DPX

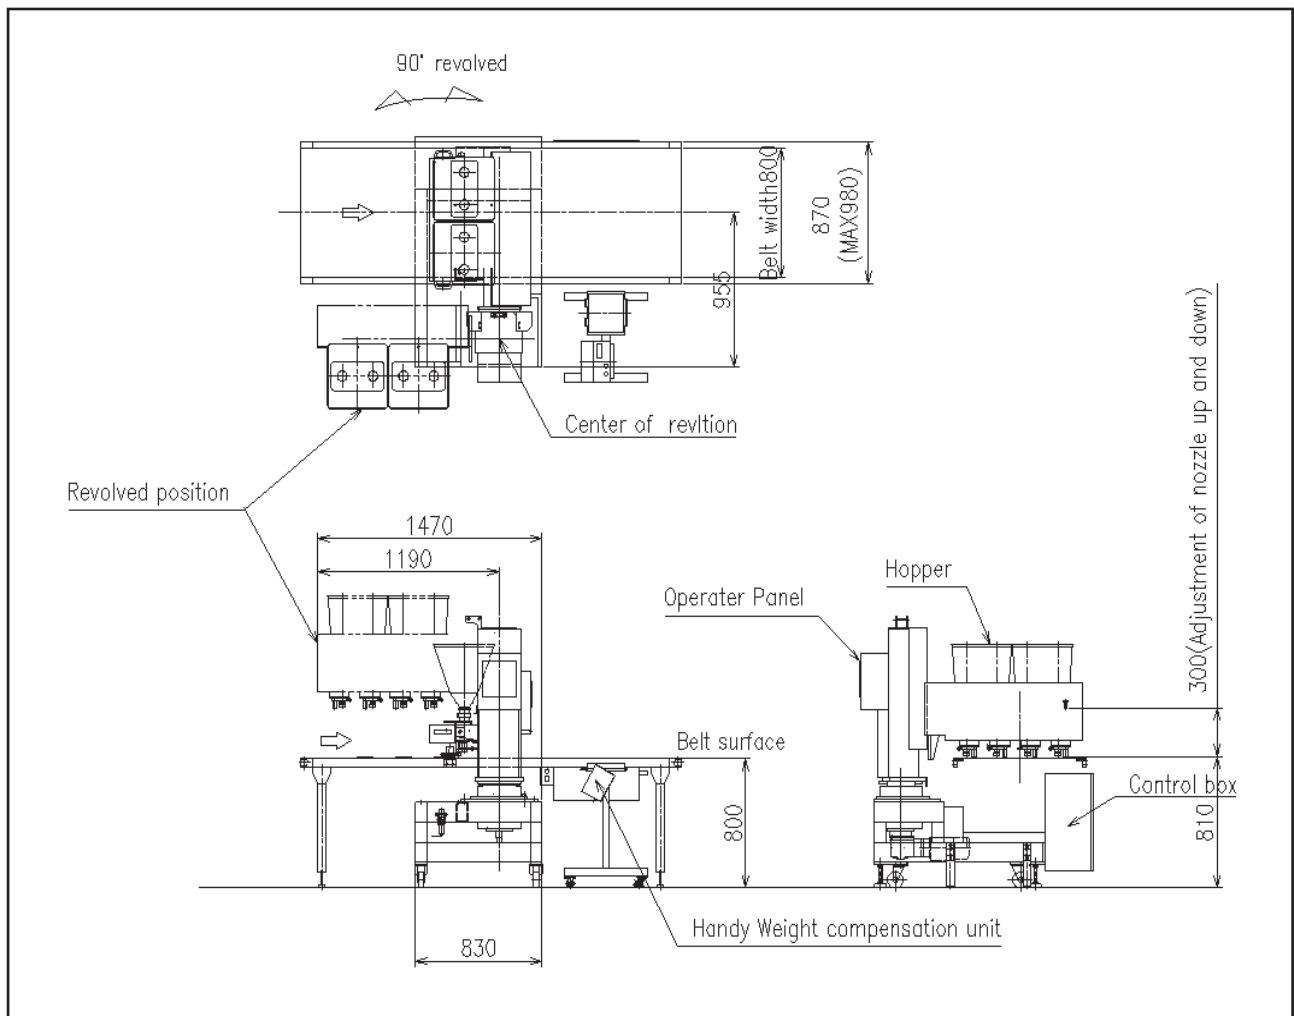

■ Specifications

Capacity: 8,000 pcs/h (in case of 4 rows)

Depositing amount: 20 to 75g (specific gravity 1.25)

Hopper capacity: 38L each

Power Source: AC200V 3Phases

Total motor output: 2.35kW

Machine weight: approx. 800kg

Note) Specifications and dimensions are subject to change without prior notice.

Note) Transformer might be needed depending upon the specifications.

OSHIKIRI MACHINERY LTD.

<https://www.oshikiri.com/>

4, Kiri-hara-cho, Fujisawa-shi, Kanagawa, 252-0811 Japan

Phone: 0466-44-6184 Fax: 0466-44-6187 E-mail: intl@oshikiri.com

Oshikiri Corporation of America

10425 Drummond Road, Philadelphia, Pennsylvania 19154-3898

Phone: 215-637-6005 Fax: 215-637-6041 E-mail:sales_oca@oshikiri.com

25.03.21 OSHIKIRI P-103-6



OSH|K|RI Website